



# EVOLine® Philosophy

The EVOLine philosophy of decentralized electrical distribution, switching and protection as close as possible to the product and where electrical faults may occur. This is the basis for the optimal ePlace in all areas of life. Different user requirements demand appropriate solutions.

The EVOLine standards covers many possibilities for electrification, protection as well as data and multimedia transmission. The EVOLine modular system also offers a high degree of individuality for every user. EVOLine supplies intelligent, tailor-made solutions from the socket to the decentralised electrical installation of entire buildings.

Configure your ePlace as an EVOLine co-designer - even for small quantities.

We are happy to support.



# Index

## Systems



**5**  
Square80



**21**  
R-Dock



**9**  
Port



**25**  
U-Dock



**13**  
FrameDock



**29**  
V-Dock



**17**  
Dock

## Modules



**33**  
Modules

## Add-On



**43**  
Cable  
Management



**47**  
Accessories

# EVoline® Success by Design

During 2015/2017 staggering 5 EVoline products were presented with the highest national and international Design Awards. One of them receiving two of the most important design awards, the ICONIC 'Best of the best products' and 'Winner' of the German Design Award, plus another receiving a 'Special Mention' with the German Design Award.

Three of the products received the world's most prestigious USA design award 'Good Design'.



**+** Function  
Design





# EVOLine<sup>®</sup> Square80



[Relocatable Power Tap]  
E363662





UL listed and tested to meet UL 1363.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.

Innovative technology for the smallest of spaces.

# EVoline<sup>®</sup> Square80

EVoline Square80 fits into standard openings that are pre-made with a diameter of 80 mm. It provides a power socket, a USB charger, and a data connection.

In its Qi version EVoline Square80 offers an additional wireless charging surface integrated into the cover, for charging of Qi capable mobile phones.

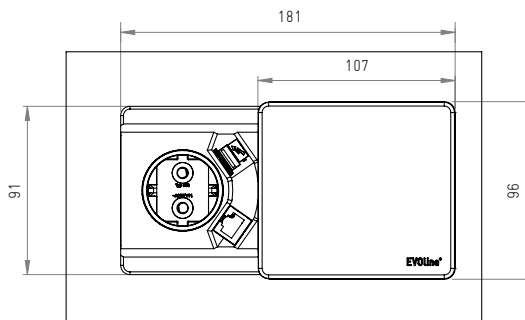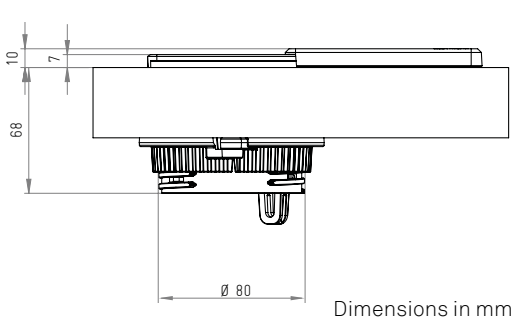

| Description | Picture | Specifications | Order Number |
|-------------|---------|----------------|--------------|
|-------------|---------|----------------|--------------|

**EVoline Square80**

For surface thickness up to 50 mm.  
 Mounting hole ø 80 mm.  
 Configuration:  
 1x NEMA 5 – 15, 15 A Receptacle  
 1x USB Charger Type A \*,5V / 1A,  
 1x Data connection (see spec)  
 Fixed supply cable 6 ft with UL-plug.



|                                     |                |
|-------------------------------------|----------------|
| Cover and housing black             |                |
| CAT 6 Socket<br>9 ft Cable and plug | 1592 7002 0100 |
| 9 ft pull out CAT 6 patch cable     | 1592 7002 0200 |
| without data                        | 1592 7002 0300 |



[Relocatable Power Tap]  
E363662



|  |                |
|--|----------------|
| Cover in simulated stainless steel<br>housing in black |                |
| CAT 6 Socket<br>9 ft Cable and plug                    | 1592 7002 0700 |
| 9 ft pull out CAT 6 patch cable                        | 1592 7002 0800 |
| without data   | 1592 7002 0900 |

**EVoline Square80 with Wireless Charger**

For surface thickness up to 50 mm.  
 Mounting hole ø 80 mm.  
 Configuration:  
 1x NEMA 5 – 15, 15 A Receptacle  
 1x USB Charger Type A \*,5V / 1A,  
 1x Data connection (see spec)  
 1x Wireless Charger  
 Fixed supply cable 6 ft with UL-plug.




|                                  |                |
|----------------------------------|----------------|
| Cover and housing black          |                |
| 9 ft Cable and plug CAT 6 Socket | 1592 7002 0400 |
| 9 ft pull out CAT 6 patch cable  | 1592 7002 0500 |
| without data                     | 1592 7002 0600 |



[Relocatable Power Tap]  
E363662



|  |                |
|--|----------------|
| Cover in simulated stainless steel<br>housing in black |                |
| 9 ft Cable and plug CAT 6 Socket                       | 1592 7002 1000 |
| 9 ft pull out CAT 6 patch cable                        | 1592 7002 1100 |
| without data   | 1592 7002 1200 |



**Wireless charging**

- resonant wireless coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges any Qi compatible device
- transmitter coil is active only when a connection to the receiving device is made


\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market. | Technical changes and printing errors reserved. | Pictures may show non-UL-variants.





# EV0line® Port



 [Furniture Power Distribution Unit]  
E482662

UL listed and tested to meet UL 962A with 1 – 5 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.




**reddot**  
design award

The retractable solution

# EVoline<sup>®</sup> Port

EVoline Port let sockets and cables simply disappear. Just the collar and cover of the Port are visible on the work surface.


The easy pull-up motion let the high-quality aluminium body appear and subsequently a push-down motion let it disappear below the surface even with attached plugs. The patented rocking cover creates enough space for a cable outlet.

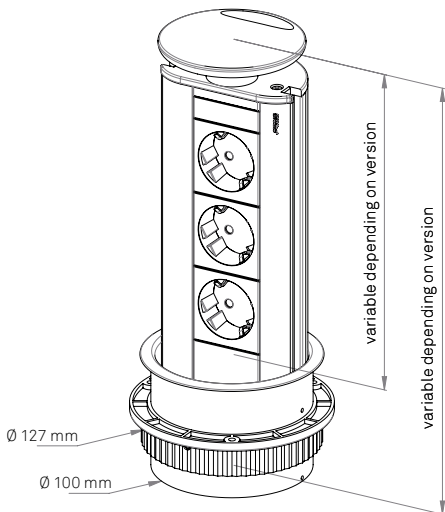

| Description | Picture | Specifications | Order Number |
|-------------|---------|----------------|--------------|
|-------------|---------|----------------|--------------|

**EVoline Port**


1x USB-Charger Type A, 5V / 1A  
 2x UL socket, NEMA 5-15, without  
 tamper resistance, black,  
 with 6ft cable and UL plug



- Aluminum profile silver anodized, Plastic Silver lid and collar 1593 1040 7400
- Aluminum profile silver anodized, Stainless Steel lid and grey plastic collar 1593 1040 7700
- Aluminum profile black anodized, black plastic lid and collar 1593 1040 7800
- Aluminum profile silver anodized, white plastic lid and collar 1593 1040 8000

**EVoline Port**

1x USB-Charger Type A, 5V / 1A  
 3x UL socket, NEMA 5-15, without  
 tamper resistance, black,  
 with 6ft cable and UL plug







- Aluminum profile silver anodized, Plastic Silver lid and collar 1593 1040 7500
- Aluminum profile silver anodized, Stainless Steel lid and grey plastic collar 1593 1040 7600
- Aluminum profile black anodized, black plastic lid and collar 1593 1040 7900
- Aluminum profile silver anodized, white plastic lid and collar 1593 1040 8100



\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market. | Technical changes and printing errors reserved. | Pictures may show non-UL-variants.

# EVoline® Port


| Description   | Picture   | Specifications  | Order Number                                |
|---|---|---|---|
| <p><b>Empty Housing EVoline Port</b></p> <p>Aluminium housing, silver anodised.<br/>For surface thickness up to 50 mm.<br/>Mounting hole <math>\varnothing</math> 102 mm.<br/>Basis for individually configured Port. Can not be ordered separately.</p>                        |    | <p>Plastic Silver lid and collar</p> <p>Stainless Steel lid and grey plastic collar</p> | <p>9330 1830 6600</p> <p>9330 1360 6600</p> |
| <p><b>Empty Housing EVoline Port CLASSIC</b></p> <p>Aluminium housing, plated inn antique brass colour.<br/>For surface thickness up to 50 mm.<br/>Mounting hole <math>\varnothing</math> 102 mm<br/>Basis for individually configured Port. Can not be ordered separately.</p> |    | <p>Plastic antique brass lacquered lid and collar</p>                                   | <p>9330 2710 6600</p>                       |
| <p><b>Empty Housing EVoline Port CHROME</b></p> <p>Chrome plated aluminium housing.<br/>For surface thickness up to 50 mm.<br/>Mounting hole <math>\varnothing</math> 102 mm.<br/>Basis for individually configured Port. Can not be ordered separately.</p>                    |  | <p>Chromed steel lid and black plastic collar</p>                                       | <p>9330 2750 6600</p>                       |
| <p><b>Empty Housing EVoline Port BLACK</b></p> <p>Aluminium housing, black anodised.<br/>For surfaces thickness up to 50 mm.<br/>Mounting hole <math>\varnothing</math> 102 mm.<br/>Basis for individually configured Port. Can not be ordered separately.</p>                  |  | <p>Plastic black lid and collar</p>   | <p>9330 5560 6600</p>                       |

<sup>1</sup> List price free of charge plus statutory value-added tax | Technical changes and printing errors reserved. | Pictures may show non-UL-variants.



# EVoline® FrameDock



 [Furniture Power Distribution Unit]  
E482662


UL listed and tested to meet UL 962A.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.

A flexible modular system for various applications.

# EVoline® FrameDock


EVoline FrameDock is a flush fitting system which can be installed horizontally or vertically - be it on a desk, a kitchen worktop, a wall, or a side of a piece of furniture. It can be mounted almost everywhere due to its low mounting depth of 51 mm and installation from the top:

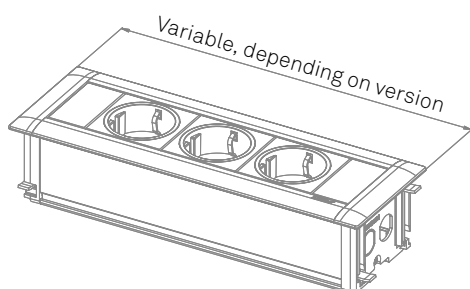


High quality design, customisable components and yet discreet.



80 mm

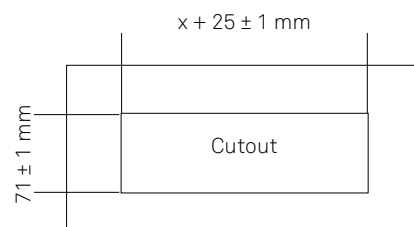51 mm



| Description  | Picture  | Specifications  | Order Number  |
|--|--|---|---|
| <p><b>EVoline FrameDock</b></p> <p>2x UL socket, NEMA 5-15, without tamper resistance, black<br/>           1x USB-Charger<br/>           6 ft connection cable with UL plug, cable inlet on the back of the profile.</p> <p>Cable lengths described from module inside the profile to plug or socket on the end of the cable.</p>  <p><b>UL</b> US [Furniture Power Distribution Unit]<br/>           E482662<br/> <b>LISTED</b></p> |   | <p>Aluminum profile silver anodized, black endcaps</p>  | <p>1596 1002 5000</p>   |
| <p><b>Empty Housing FrameDock</b></p> <p>For surface thickness up to 38 mm.<br/>           Basis for individually configured FrameDock. Can not be ordered separately.</p>   |  | <p>Aluminum profile silver anodised Screw covers black plastic</p> <p>Aluminum profile silver anodised; Screw covers silver lacquered plastic</p> <p>Aluminum profile black anodised Screw covers black plastic</p> | <p>9331 2180 6600</p> <p>9331 2550 6600</p> <p>9331 5330 6600</p> |

### Configuration Example



# EVoline® Modular System

## Maximum Individuality

The modular approach of EVoline opens nearly endless possibilities of bespoke configurations and connectivity solutions. Either for the electrification of work places in an open-plan office or in the kitchen at home:

EVoline offers the perfect solution for every task.

EVoline products can be equipped with a wide range of switches, power sockets, and modules for data, multimedia and safety.



**EVoline®** Dock



**EVoline®** R-Dock



**EVoline®** FrameDock



**EVoline®** Port



**EVoline®** V-Dock




**EVoline®** U-Dock





# EVoline<sup>®</sup> Dock



 [Relocatable Power Tap]  
E363662



UL listed and tested to meet UL 1363 with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.




Above desk quality for home, office, hotel.

# EVoline<sup>®</sup> Dock

EVoline Dock sits above the desk allowing maximum workspace. Various fixing options are available like EVoline Quicklock, clamps, pillars, etc.

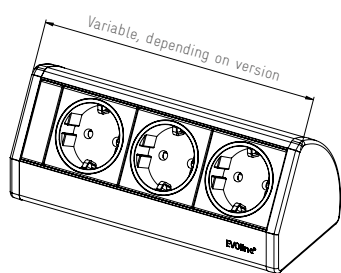The configurable charging and data station can be equipped with the complete EVoline Modules range.



| Description   | Picture   | Specifications   | Order Number  |
|---|---|--|---|
| <p><b>EVoline Dock</b></p> <p>2x UL socket, NEMA 5-15, without tamper resistance, black,<br/>1x USB-Charger<br/>6 ft cord with UL plug.<br/>Cable lengths described from module inside the profile to plug or socket on the end of the cable.</p> |    | <p>Aluminum profile silver anodized, silver endcaps</p> <p>Aluminum profile black anodized, black endcaps</p> <p>Aluminum profile white powder coated, white endcaps</p> | <p>1593 0393 7300</p> <p>1593 0393 7100</p> <p>1593 0004 0700</p> |
|  <p>[Relocatable Power Tap]<br/>E363662</p>  |   |  |   |
| <p><b>Empty Housing EVoline Dock BLACK</b></p> <p>Aluminium housing<br/>Basis for individually configured Dock. Can not be ordered separately.</p>  |    | <p>Aluminum profile black anodized, black endcaps</p>  | <p>9330 1811 6600</p>   |
| <p><b>Empty Housing EVoline Dock SILVER</b></p> <p>Aluminium housing<br/>Basis for individually configured Dock. Can not be ordered separately.</p>   |  | <p>Aluminum profile silver anodized, black endcaps</p>   | <p>9330 1810 6600</p>   |
| <p><b>Empty Housing EVoline Dock STAINLESS</b></p> <p>Aluminium housing<br/>Basis for individually configured Dock. Can not be ordered separately.</p>  |  | <p>Aluminum profile ALANOX anodized, black endcaps</p>   | <p>9330 8450 6600</p>   |
| <p><b>Empty Housing EVoline Dock WHITE</b></p> <p>Aluminium housing<br/>Basis for individually configured Dock. Can not be ordered separately.</p>  |  | <p>Aluminum profile white powder coated, white endcaps</p>   | <p>9331 3530 6600</p>   |

\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market. | Technical changes and printing errors reserved. | Pictures may show non-UL-variants.

# EVoline® Hightech Production

Standard products in thousands, customised single-unit products and millions of special switches per year. Every single item is recorded and tested for function and safety before dispatch.

Whether plastic parts or metal parts with silver contacts: All parts are produced in our own plant and tested throughout the production process. This pattern continues in our assembly lines. We are reaching zero-defect quality.

It goes without saying that we do not make use of temporary workers or piecework to manufacture our Hightech Products.


Our employees work self-responsibly.





# EVoline® R-Dock



 [Furniture Power Distribution Unit]  
E482662



UL listed and tested to meet UL 962A with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.

Contemporary and modern for all workspaces.

# EVoline<sup>®</sup> R-Dock

EVoline R-Dock can be installed into any right-angled corner.

With its flat back and angled front fascia, it is comfortable to use. Freely configurable.



| Description | Picture | Specifications | Order Number |
|-------------|---------|----------------|--------------|
|-------------|---------|----------------|--------------|

**EVoline R-Dock**

2x UL socket, NEMA 5-15,  
without tamper-resistance,  
1x USB-Charger  
6 ft cord with UL plug.  
Cable lengths described from modu-  
le inside the profile to plug or socket  
on the end of the cable.



1598 0001 1900



**Empty Housing EVoline R-Dock**

Aluminium housing.  
Basis for individually configured  
R-Dock. Can not be ordered sepa-  
rately.



Silver anodised

9331 0620 6600

**Empty Housing EVoline R-Dock**


Aluminium housing.  
Basis for individually configured  
R-Dock. Can not be ordered sepa-  
rately.



White powder-coated

9331 4340 6600

**Configuration Example**

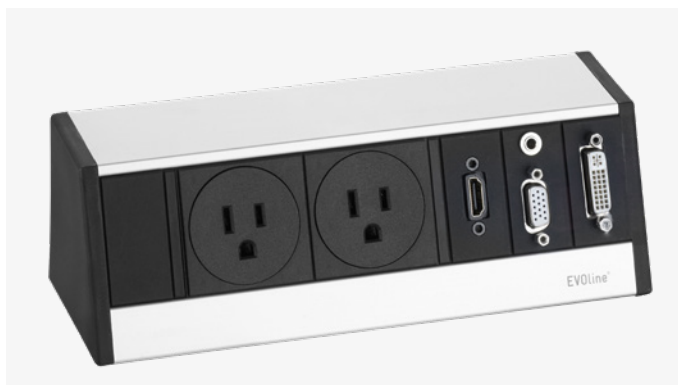

\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market. | Technical changes and printing errors reserved. | Pictures may show non-UL-variants.





# EVoline® Made in Germany

Our team of excellent engineers and developers create our entire product range with special emphasis on maximum installation efficiency and detail. One example is our fully automated special machine for patented switches.

We are building tools - in a modular way - mainly in our own tool making department.

Outsourcing remains a foreign word for us.


Therefore we updated our company's logo:

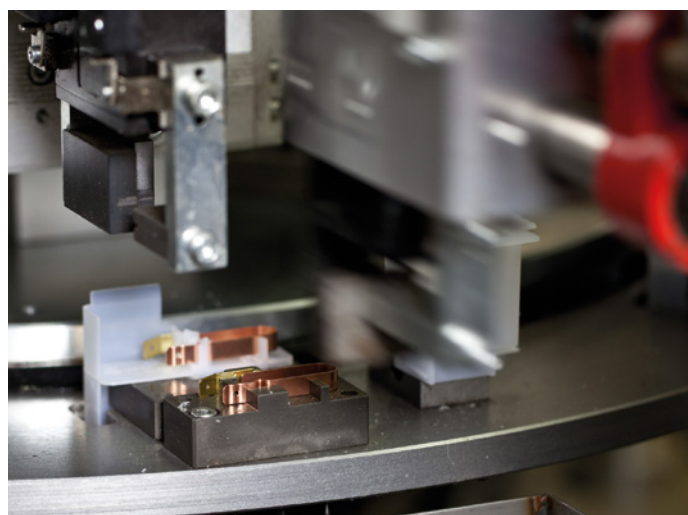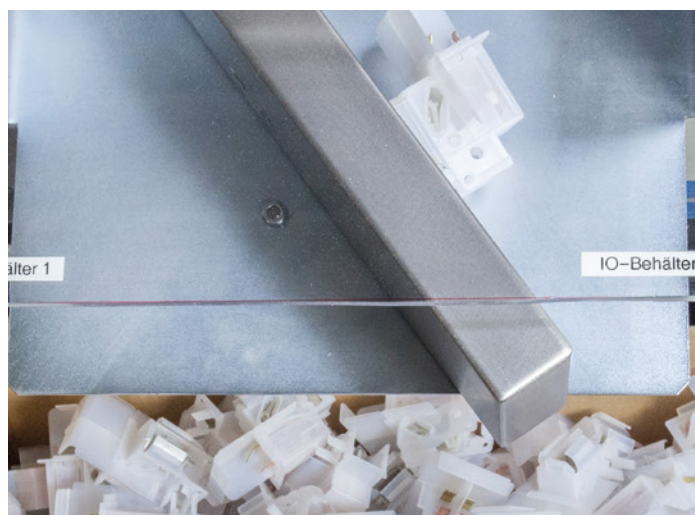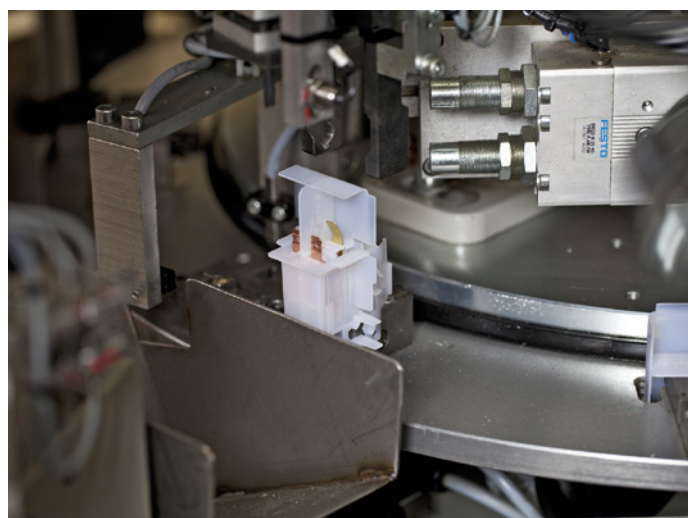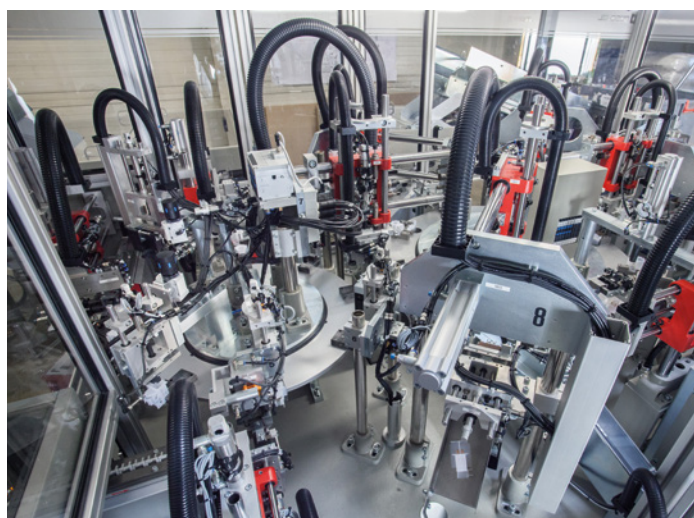



# EVOLine® U-Dock



 [Furniture Power Distribution Unit]  
E482662

UL listed and tested to meet UL 962A with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.





Robust and Save.

# EVoline® U-Dock

EVoline U-Dock can be mounted to any work surface in various ways.

As a robust base for a professional power and data supply, the freely configurable aluminium profile can be equipped with various power and data modules as well as safety devices for protection of personnel and machinery.

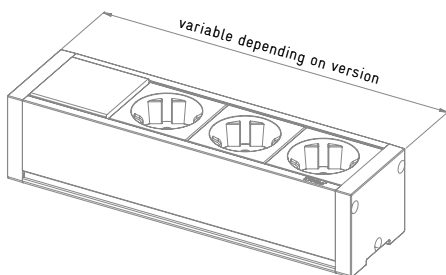

| Description | Picture | Specifications | Order Number |
|-------------|---------|----------------|--------------|
|-------------|---------|----------------|--------------|

**EVoline U-Dock**

2x UL socket, NEMA 5-15, without tamper resistance  
 1x USB-Charger  
 6 ft cord with UL plug.  
 Cable lengths described from module inside the profile to plug or socket on the end of the cable.



Silver anodised  
 End caps optionally with mounting angles

1596 0003 8200



**Empty Housing EVoline U-Dock**

Aluminium housing.  
 Basis for individually configured U-Dock. Can not be ordered separately.



Silver anodised  
 End caps optionally with or without mounting angles

9330 8510 6600

**Configuration Example**



\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market. | Technical changes and printing errors reserved. | Pictures may show non-UL-variants.

# EVoline<sup>®</sup> Living Office at Schulte

Purist design and intelligent technology in the Living Office.

Schulte Elektrotechnik is one of the pioneers of innovative office infrastructure. For us that includes flexible and decentralised electrical distribution as well as user oriented high quality electrification of the workspace, saving the environment.

Miles of installed cables do not fit this concept at all. You will neither find wall switches and wall sockets, nor ceiling lights – and the usual grid of floor boxes is missing, too.


Bundles of cables used in the traditional radial arrangement are replaced by cost-saving electrical stub lines.

In our Living Office area on the second floor of our new building extension you can witness the EVoline philosophy directly. Transparent floor panels offer a view to stub lines and Consolidation Points. You can find all EVOLINE products for varying power and data connections on the desks.



# EVOLine® V-Dock



 **UL** US [Furniture Power Distribution Unit]  
E482662

UL listed and tested to meet UL 962A with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.





Space saving

# EVoline<sup>®</sup> V-Dock

The EVoline V-Dock gives dead corners a benefit.

It can be installed horizontally or vertically and is variable in length. In addition, the supply cable is concealed using the space between the back of the profile and the wall corner.

Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.





| Description | Picture | Specifications | Order Number |
|-------------|---------|----------------|--------------|
|-------------|---------|----------------|--------------|

**EVoline V-Dock**

2x UL socket, NEMA 5-15,  
without tamper-resistance,  
1x USB-Charger  
6 ft cord with UL plug.  
Cable lengths described from modu-  
le inside the profile to plug or socket  
on the end of the cable.



1593 6033 6300



**Empty housing EVoline V-Dock**

Aluminium housing  
Basis for individually configured  
V-Dock. Can not be ordered sepa-  
rately. From a length of 250 mm, 2 profile  
brackets of 100 mm are required for fixing.



Silver anodised

9330 5600 6600

**Empty housing EVoline V-Dock**

Aluminium housing  
Basis for individually configured  
V-Dock. Can not be ordered sepa-  
rately. From a length of 250 mm, 2 profile  
brackets of 100 mm are required for fixing.



Black anodised

9331 5850 6600

**Configuration Example**



\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market. | Technical changes and printing errors reserved. | Pictures may show non-UL-variants.

# EVoline® Innovations within the building

We do not just talk about environmental protection, energy independence and reducing energy costs – we are actively involved.

Already in 1976, in our first plant, we used the excess heat of the plastic component production to heat the entire building of 5,000 square meters – against the advice of experts: “Too risky to install plastic pipes in an industrial floor; the costs would buy many tons of heating oil, etc.” The system works perfectly to this day! In our new building we take new risks and entered uncharted territory. A young scientist published a study about a water circulation system in connection with geothermal energy and concrete core activation in floor and ceiling. Rooms equipped with this system maintain a “comfort zone” throughout summer and winter. The excess heat produced in summer is stored in the soil at a depth of 100 meters; the backflow is used for cooling.

Together with shades and blinds against direct impact of sunlight an average temperature of 21 degrees is maintained throughout the year. In cold weather, the process is reversed. In case of interruptions or lack of process heat from our plastic injection machines, a gas burner automatically engages to provide heat.



Markus Sommer, expert for near-surface geothermal energy. Doing a test bore.



Concrete core activation in the ceiling before application of concrete.

The investments for this systems were quite high. We did not receive any subsidies for this new endeavour. However, we proved that like in 1976, that we are again be successful with our investment for us and the environment.

# EVOLine® Modules



Endless possibilities.

# EVoline® Modules

EVoline systems can be configured to individual needs with a wide range of modules available - there is no general solution for the supply of e-connectivity.











Often just power sockets are the sufficient configuration: in a different environment international sockets plus USB Chargers may be the right choice. With telephones, EDP and multimedia connectors options become even more diverse.

Whether a data or a HDMI connector, the individual application defines the requirements.

Realizable combinations of shown modules depend on the UL regulations. Please ask for more information.







The chart below gives an overview about country specific socket versions. Deviations may occur.

|   |   |                        |  |
|---|---|------------------------|--|
| <b>Socket VDE (CEE 7/3)</b><br><b>230 V, 16 A</b>             |    | Plug Type<br>F, E+F, C | Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine |
| <b>Socket (CEE 7/5)</b><br><b>230 V, 16 A</b>                 |    | Plug Type<br>E, E+F, C | France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia  |
| <b>Socket (BS 962A)</b><br><b>230 V, 3,15 A oder 5 A</b>      |    | Plug Type<br>G         | Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe  |
| <b>Socket (SEV 1011)</b><br><b>230 V, 10 A, T13</b>           |    | Plug Type<br>J, C      | Switzerland, Liechtenstein   |
| <b>Socket (SEV 1011)</b><br><b>230 V, 16 A, T23</b>           |    | Plug Type<br>J, C      | Switzerland, Liechtenstein   |
| <b>Socket (DS 608842-D1)</b><br><b>230 V, 13 A</b>            |   | Plug Type<br>K, C      | Denmark, Greenland   |
| <b>Socket (DS 608842-D1)</b><br><b>230 V, 13 A, EDV</b>       |  | Plug Type<br>K EDV     | Denmark, Greenland   |
| <b>Socket (CEI 23-16-VII)</b><br><b>230 V, 16 A oder 10 A</b> |  | Plug Type<br>L, C      | Italy, Chile, Cuba   |
| <b>Socket (AS 3112)</b><br><b>230 V, 10 A</b>                 |  | Plug Type<br>I         | Australia, New Zealand, Papua New Guinea, several Pacific Islands  |
| <b>Socket (NEMA 5-15)</b><br><b>120 V, 15 A</b>               |  | Plug Type<br>B         | USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Carribean Islands  |

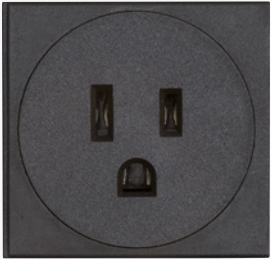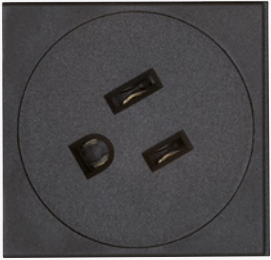

\* Power modules are only available completely assembled in EVoline products.









| Description   | Picture   | Order Nr. & Specifications      | <i>                     Dock<br/>                     FrameDock<br/>                     Port<br/>                     R-Dock<br/>                     V-Dock<br/>                     U-Dock                 </i> |
|---|---|---------------------------------|--|
| <p><b>Socket 0°, 15 A<br/>without tamper resistance</b></p> <p>USA, Canada, *<br/>for plug type: B (NEMA, 5-15)</p> <p>Installation dimensions: 50 x 50 mm</p>  |    | <p>9330 5360 6600<br/>black</p> | <p>• • • • • •</p>   |
| <p><b>Socket 60°, 15 A<br/>without tamper resistance</b></p> <p>USA, Canada, *<br/>for plug type: B (NEMA, 5-15)</p> <p>Installation dimensions: 50 x 50 mm</p>   |    | <p>9330 5370 6600<br/>black</p> | <p>• • • • •</p>   |
| <p><b>Socket 0°, 15 A Angled Outlet<br/>without tamper resistance</b></p> <p>USA, Canada, *<br/>for plug type: B (NEMA, 5-15)<br/>Not suitable for angled plugs.</p> <p>Installation dimensions: 75 x 50 mm</p>   |  | <p>9330 4030 6600<br/>black</p> | <p>•</p>   |
| <p><b>USB Charger*</b></p> <p>USB Type A Charger, charging function only.<br/>Rated supply voltage:<br/>100-240 VAC +/-10%.<br/>No-load power consumption at 230 VAC &lt;= 0,1 Watt.<br/>Output voltage: 5VDC +/-5%.<br/>Rated output current: 1 A</p> <p>Installation dimensions: 25 x 50 mm</p> |  | <p>9331 5580 6600<br/>black</p> | <p>• • • • • •</p>   |


\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market. | Technical changes and printing errors reserved. Pictures may show non-UL-variants.

/ Dock /  
 / FrameDock /  
 / Port /  
 / R-Dock /  
 / V-Dock /  
 / U-Dock /

| Description   | Picture   | Order Nr. & Specifications   | / Dock / | / FrameDock / | / Port / | / R-Dock / | / V-Dock / | / U-Dock / |
|---|---|--|----------|---------------|----------|------------|------------|------------|
| <p><b>Power Supply Module with cable and Plug</b></p> <p>Type B<br/>                     115 V, 15 A, AWG 14<br/>                     i.e. USA, Canada (UL/CSA)</p>     |  | <p>9330 9160 6600<br/>                     Cable length 3 m, black</p> <p>Different lengths on request</p> | •        | •             | •        | •          | •          | •          |
| <p><b>Overload Circuit Breaker*</b></p> <p>Switch-on overload switch<br/>                     Installation dimensions: 25 x 50 mm</p> <p>Mandatory for ≥ 4 sockets.</p> |  | <p>9332 0380 6600<br/>                     U.S.A.<br/>                     Fuse: 15 A, 125 V~</p>          | •        | •             | •        | •          | •          | •          |

| Description  | Picture   | Order Nr. & Specifications   | / Dock<br>/ FrameDock<br>/ Port<br>/ R-Dock<br>/ V-Dock<br>/ U-Dock<br>/ |
|--|---|--|--|
| <p><b>Data Plate with Data Socket</b><br/><b>Reichle &amp; De-Massari</b></p> <p>with Cable and Plug / Socket Installation Dimensions:<br/>25 x 50 mm</p>  |    | <p>9330 8270 6600<br/>RJ45 CAT6 unshielded<br/>9 ft Cable, Plug</p> <p>9330 7860 6600<br/>RJ45 CAT6 shielded<br/>9 ft Cable, Plug</p> <p>9331 0020 6600<br/>RJ45 CAT6A shielded<br/>9 ft Cable, Plug</p> | <p>• • • •</p> <p>• • • •</p> <p>• • • •</p>                             |
| <p><b>Data Plate Data Socket</b><br/><b>Reichle &amp; De-Massari</b></p> <p>Angled Outlet with labeling field with Cable and Plug<br/>Installation Dimensions: 50 x 50 mm</p>                        |   | <p>9331 0010 6600<br/>RJ45 CAT6 unshielded<br/>9 ft Cable, Plug</p> <p>9330 6140 6600<br/>RJ45 CAT6 shielded<br/>9 ft Cable Plug</p> <p>9331 0030 6600<br/>RJ45 CAT6A shielded 9 ft<br/>Cable Plug</p>   | <p>• • •</p> <p>• • •</p> <p>• • •</p>                                   |
| <p><b>Data Plate with 2x Data Sockets</b><br/><b>Reichle &amp; De-Massari</b></p> <p>Angled Outlet with labeling field,<br/>with Cable and Plug / Socket<br/>Installation Dimensions: 50 x 50 mm</p> |  | <p>9330 4340 6600<br/>RJ45 CAT6 unshielded<br/>9 ft Cable, Plug</p> <p>9330 1230 6600<br/>RJ45 CAT6 shielded<br/>9 ft Cable, Plug</p> <p>9331 0040 6600<br/>RJ45 CAT6A shielded<br/>9 ft Cable, Plug</p> | <p>• • •</p> <p>• • •</p> <p>• • •</p>                                   |


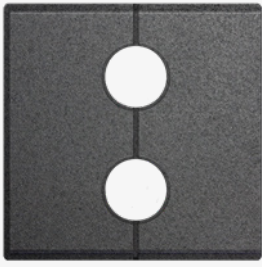
| Description   | Picture   | Order Nr. & Specifications  | / Dock /<br>/ FrameDock /<br>/ Port /<br>/ R-Dock /<br>/ V-Dock /<br>/ U-Dock / |
|---|---|---|---|
| <p><b>Data Plate with Data Socket</b><br/><b>ELBRO</b></p> <p>Modular Adaptor RJ45 to RJ45<br/>1:1 interconnected for patchcable.<br/>Installation Dimensions: 25 x 50 mm</p>   |    | <p>9330 6550 6600<br/>RJ45 CAT6 unshielded</p> <p>9330 8410 6600<br/>(RJ45) CAT6 shielded</p> <p>9331 4080 6600<br/>(RJ45) CAT6A shielded</p>   | <p>• • • •</p> <p>• • • •</p> <p>• • • •</p>                                    |
| <p><b>Data Plate with Data Socket</b><br/><b>ELBRO</b></p> <p>Angled Outlet with labeling field.<br/>Modular Adaptor<br/>RJ45 to RJ45<br/>1:1 interconnected for patchcable.<br/>Installation Dimensions:<br/>50 x 50 mm</p>    |    | <p>9330 6560 6600<br/>(RJ45) CAT6 unshielded</p> <p>9330 5880 6600<br/>(RJ45) CAT6 shielded</p> <p>9331 4090 6600<br/>(RJ45) CAT6A shielded</p> | <p>• • •</p> <p>• • •</p> <p>• • •</p>  |
| <p><b>Data Plate with 2x Data Sockets</b><br/><b>ELBRO</b></p> <p>Angled Outlet with Labeling Field<br/>Modular Adaptor<br/>RJ45 to RJ45<br/>1:1 interconnected for patchcable.<br/>Installation Dimensions:<br/>50 x 50 mm</p> |  | <p>9330 6570 6600<br/>(RJ45) CAT6 unshielded</p> <p>9330 3920 6600<br/>(RJ45) CAT6 shielded</p> <p>9331 4100 6600<br/>(RJ45) CAT6A shielded</p> | <p>• • •</p> <p>• • •</p> <p>• • •</p>  |

| Description   | Picture   | Order Nr. & Specifications  | Dock<br>FrameDock<br>Port<br>R-Dock<br>V-Dock<br>U-Dock |
|---|---|---|---|
| <p><b>Audio Port 3.5mm</b></p> <p>1 x Stereo Jack socket 3.5 mm<br/>Installation dimensions: 25 x 50 mm</p>   |    | <p>9330 0910 6600<br/>9 ft cable and plug</p>   | <p>• • • • •</p>  |
| <p><b>Audio Port 3.5mm</b></p> <p>Angled outlet with labeling field.<br/>1 x Stereo Jack socket 3.5 mm<br/>Installation dimensions: 50 x 50 mm</p>      |    | <p>9330 2460 6600<br/>9 ft cable and plug</p>   | <p>• • • • •</p>  |
| <p><b>HDMI-Socket</b></p> <p>HDMI 1.4 connector with gilded contacts.<br/>Installation dimensions: 25 x 50 mm.</p>                                      |  | <p>9330 6060 6600<br/>1 ft Cable and Socket</p> <p>9330 6070 6600<br/>9 ft Cable and Plug</p> <p>16 ft Cable and Plug</p>   | <p>• • • • •</p> <p>• • • • •</p>                       |
| <p><b>HDMI-Socket</b></p> <p>Angled outlet with labeling field<br/>HDMI 1.4 connector with gilded contacts.<br/>Installation dimensions: 50 x 50 mm</p> |  | <p>9330 6080 6600<br/>0.9 ft Cable and Socket</p> <p>9330 6090 6600<br/>9 ft Cable and Plug</p> <p>16 ft Cable and Plug</p> | <p>• • •</p> <p>• • •</p>                               |




/ Dock /  
 / FrameDock /  
 / Port /  
 / R-Dock /  
 / V-Dock /  
 / U-Dock /




| Description  | Picture   | Order Nr. & Specifications                                  | / Dock / | / FrameDock / | / Port / | / R-Dock / | / V-Dock / | / U-Dock / |
|--|---|---|----------|---------------|----------|------------|------------|------------|
| <p><b>DisplayPort-Socket</b></p> <p>for digital signals DP 1.2 compliant.<br/>Installation dimensions: 25 x 50 mm</p>  |    | <p>9331 7510 6600<br/>1.3 ft Cable and Socket</p>           | •        | •             | •        | •          | •          | •          |
| <p><b>DisplayPort-Socket</b></p> <p>Angled outlet with labeling field for digital signals<br/>DP 1.2 compliant.<br/>Installation dimensions: 50 x 50 mm</p>  |    | <p>9331 7520 6600<br/>1.3 ft Cable and Socket</p>           |          | •             |          | •          | •          | •          |
| <p><b>USB 3.0 Connector</b></p> <p>USB 3.0 Type A socket<br/>for connection of USB standard consumer devices.<br/>Data rate up to 5 GBit/s<br/>Installation dimensions: 25 x 50 mm.</p>                                      |  | <p>9331 8620 6600<br/>1 ft Cable and Socket</p>             | •        | •             | •        | •          |            |            |
| <p>USB 3.0 Type A socket<br/>for connection of USB standard consumer devices.<br/>Data rate up to 5 GBit/s<br/>Installation dimensions: 25 x 50 mm.</p>  |  | <p>9331 1450 6600<br/>3 ft USB Cable Plug USB 3 Type A</p>  | •        | •             | •        | •          |            |            |
| <p>USB 3.0 Type A socket<br/>for connection of USB standard consumer devices.<br/>Data rate up to 5 GBit/s<br/>Installation dimensions: 25 x 50 mm.</p>  |  | <p>9 ft USB Cable Plug USB 3 Type A</p>                     |          |               |          |            |            |            |
| <p><b>USB 3.0 Connector</b></p> <p>USB 3.0 Type A socket<br/>for connection of USB standard consumer devices.<br/>Data rate up to 5 GBit/s<br/>Angled outlet with labeling field<br/>Installation dimensions: 50 x 50 mm</p> |  | <p>9331 8630 6600<br/>1 ft Cable and Socket</p>             | •        | •             | •        | •          |            |            |
| <p>USB 3.0 Type A socket<br/>for connection of USB standard consumer devices.<br/>Data rate up to 5 GBit/s<br/>Angled outlet with labeling field<br/>Installation dimensions: 50 x 50 mm</p>                                 |  | <p>9331 1460 6600<br/>3 ft USB Cable, Plug USB 3 Type A</p> | •        | •             | •        | •          |            |            |
| <p>USB 3.0 Type A socket<br/>for connection of USB standard consumer devices.<br/>Data rate up to 5 GBit/s<br/>Angled outlet with labeling field<br/>Installation dimensions: 50 x 50 mm</p>                                 |  | <p>9 ft USB Cable Plug USB 3 Type A</p>                     |          |               |          |            |            |            |

| Description   | Picture   | Order Nr. & Specifications   | <i>Dock</i><br><i>FrameDock</i><br><i>Port</i><br><i>R-Dock</i><br><i>V-Dock</i><br><i>U-Dock</i> |
|---|---|--|---|
| <p><b>Cable Outlet Module</b><br/> <b>1 cable passage</b></p> <p>Cable can be pulled through<br/>           Colour: black<br/>           Installation dimensions: 50 x 50 mm</p>  |  | <p>9331 3790 6600<br/>           Ø 0.3 in</p> <p>9331 0560 6600<br/>           Ø 0.4 in</p> <p>9331 1670 6600<br/>           Ø 0.66 in</p> <p>Additional diameters on demand</p> | <p>• • • • • •</p> <p>• • • • • •</p> <p>• • • • • •</p>  |
| <p><b>Cable Outlet Module</b><br/> <b>2 cable passages</b></p> <p>Cable can be pulled through<br/>           Colour: black<br/>           Installation dimensions: 50 x 50 mm</p> |  | <p>9331 3800 6600<br/>           Ø 0.3 in</p> <p>9331 1930 6600<br/>           Ø 0.4 in</p> <p>Additional diameters on demand</p>  | <p>• • • • • •</p> <p>• • • • • •</p>   |





# EVOLine<sup>®</sup> Cable Management

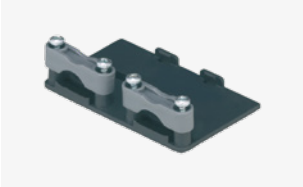

| Description  | Picture   | Specifications   | Order Number   |
|--|---|--|----------------|
| <p><b>Bridge Module Arc 90°</b></p> <p>includes 4 Fixing bolts</p>                 |    |    | 1593 5090 0600 |
| <p><b>Bridge Module T</b></p> <p>includes 6 Fixing bolts</p>                       |    |    | 1593 5090 0500 |
| <p><b>Bridge Module Cross</b></p> <p>includes 8 Fixing bolts</p>                   |   |   | 1593 5090 0200 |
| <p><b>Bridge Module Adapter WireLane</b></p> <p>can also be used as end piece.</p> |  |  | 1593 5090 0100 |
| <p><b>Bridge Module Vertical</b></p>   |  |  | 1593 5090 0400 |
| <p><b>Bridge Connector</b></p> <p>2 Pieces</p>                                     |  |  | 1593 5090 0300 |






| Description  | Picture   | Specifications   | Order Number  |
|--|---|--|---|
| <p><b>EVoline Bridge</b></p> <p>cable cover made of aluminium for screw fixing, with black trim, without screws</p>  |    | <p><b>4 CableClips</b></p> <p>Length: 1.6 ft<br/>Length: 2.6 ft<br/>Length: 3.9 ft</p> | <p>1593 5010 5000<br/>1593 5010 8000<br/>1593 5011 2000</p> |
|  |   | <p><b>8 CableClips</b></p> <p>Length: 5.2 ft<br/>Length: 6 ft</p>                      | <p>1593 5011 6000<br/>1593 5012 0000</p>                    |
| <p><b>EVoline WireLane</b></p> <p>under desk cable channel made of plastic. One package consists of 3 pieces, 250-330 mm each. The elements can be linked and separated.</p> |    | <p>Length: 9.8– 13 in</p> <p>Colour: black<br/>Colour: lightgrey</p>                   | <p>6593 5201 0000<br/>6593 5211 0000</p>                    |
| <p><b>EVoline WireLane Strain Relief</b></p> <p>in black plastic, with two clamps for cable</p>  |  |  | <p>6593 5290 0100</p>                                       |







| Description   | Picture   | Specifications   | Order Number  |
|---|---|--|---|
| <p><b>EVOLine Rail</b></p> <p>For under desk installation, the EVOLine Rail is available for the EVOLine U-Dock and EVOLine Express range.</p> <p>Bespoke profile lengths available upon request.</p> |    | <p><b>for EVOLine U-Dock</b></p> <p><b>2 black plastic brackets with 2 aluminium profiles</b></p> <p>Profile length 5.9 in</p> <p>Profile length 11.8 in</p> <p>Profile length 19.6 in</p> | <p>1593 5400 0700</p> <p>1593 5400 0100</p> <p>1593 5400 0200</p> |
|   |    | <p><b>3 black plastic brackets with 4 aluminium profiles</b></p> <p>Profile length 2 x 11.8 in</p> <p>Profile length 2 x 15.7 in</p>   | <p>1593 5400 0500</p> <p>1593 5400 0600</p>                       |
|   |   | <p><b>Individual</b></p> <p>1 black plastic brackets for EVOLine U-Dock</p>  | <p>9331 6220 0000</p>   |
|   |  | <p>1 Pair Aluminium profiles per 3.9 in</p>  | <p>9331 6210 0000</p>   |

# EV0line® Accessories



| Description   | Picture   | Specifications  | Order Number  |
|---|---|---|---|
| <p><b>Mounting Clamp</b></p> <p>twist-proof including non-slip covering<br/>           Colour: black<br/>           for profiles:<br/>           Dock, U-Dock, R-Dock</p>                                 |    | <p>Span width 8 40 mm<br/>           Span width 8 40 mm, 2 ×<br/>           Span width 40 75 mm<br/>           Span width 40 75 mm, 2 ×</p>       | <p>1599 0902 1200<br/>           1599 0902 0500<br/>           1599 0902 1300<br/>           1599 0902 1000</p> |
| <p><b>Mounting Clamp</b></p> <p>twist-proof including non-slip covering<br/>           Colour: white<br/>           for profiles:<br/>           Dock, U-Dock, R-Dock</p>                                 |    | <p>Span width 8 – 40 mm<br/>           Span width 8 – 40 mm, 2 ×<br/>           Span width 40 – 75 mm<br/>           Span width 40 75 mm, 2 ×</p> | <p>1599 0909 3300<br/>           1599 0909 5600<br/>           1599 0909 3900<br/>           1599 0909 5700</p> |
| <p><b>Stainless Steel Mounting Clamp</b></p> <p>twist-proof desk clamp for EVoline profiles, installed and secured with allen screws<br/>           For profiles:<br/>           Dock, U-Dock, R-Dock</p> |  | <p>For Tabletops thickness<br/>           18 – 25 mm</p>  | <p>1599 0909 1500</p>   |
| <p><b>Mounting set</b><br/>           for under cabinet installation</p> <p>consists of two EVoline Dock brackets with wood screws<br/>           screw: 3.5 x 15 mm</p>                                  |  |   | <p>1599 0903 8300</p>   |
| <p><b>Mounting set</b><br/>           for desk installation</p> <p>consists of two EVoline Dock brackets with wing nut screws<br/>           screw: M4 x 40 mm</p>  |  |   | <p>1599 0903 8200</p>   |

| Description  | Picture   | Specifications  | Order Number  |
|--|---|---|---|
| <p><b>Angle Profile</b></p> <p>for fixing of EVoline V-Dock</p>  |    | <p>Length: 100 mm<br/>Length: 60 mm</p>   | <p>1599 0908 4400<br/>1599 0909 6400</p>                          |
| <p><b>EVoline Quicklock Pro</b></p> <p>fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles:<br/>EVoline Dock, EVoline R-Dock</p> |    | <p>Length: 100 mm<br/>without bracket</p> <p>length: 150 mm includes<br/>bracket for EVoline Wire-<br/>Lane connection</p> <p>length: 200 mm includes<br/>bracket for<br/>EVoline WireLane con-<br/>nection</p> | <p>1599 0910 8500</p> <p>1599 0910 8300</p> <p>1599 0910 8400</p> |
| <p><b>EVoline Rubber gasket</b></p> <p>fits under the collar of the EVoline Port.</p>  |   |   | <p>1599 0903 9100</p>   |
| <p><b>EVoline Laptop Secure</b></p> <p>Sturdy mounting lug for commercial laptop anti-theft devices.<br/>Such as Kensington Lock.</p>  |  | <p>Die-cast, silver-colored<br/>Length: 41 mm<br/>Breite: 9 mm<br/>Höhe: 22 mm</p>  | <p>9331 3140 0000</p>   |

## Schulte Electro Systems Corporation

41W020 Seavey Road  
Sugar Grove, IL 60554-9573  
USA

Telefon +1 630-409-9445

e-mail [sales@evoline-usa.com](mailto:sales@evoline-usa.com)

Internet [www.evoline-usa.com](http://www.evoline-usa.com)

## Schulte Elektrotechnik GmbH & Co. KG

Jüngerstraße 21  
D - 58515 Lüdenscheid  
Germany

Telefon +49 23 51 / 94 81 - 0

Fax +49 23 51 / 4 26 58

e-mail [info@schulte.com](mailto:info@schulte.com)

Internet [www.evoline.com](http://www.evoline.com)

