



April 2018

Ladies and Gentlemen,

EVOLine offers intelligent solutions for the distribution of power and data – from a single plug to electrical installations of entire buildings.

We focus on uncompromising quality in technology and design, reflected by numerous awards already won. Our flexible modular systems including products for a decentralised electrical distribution system providing the opportunity to realize the full potential of our philosophy, the decentralised electrical distribution, in economy, sustainability and safety.

Switching and protection as close as possible to the product and where electrical faults may occur.

We cordially invite you to visit us in the Sauerland. In our new buildings ,living office‘ and production facilities we can show the advantages of our concept. As well we are happy to present our geothermal energy plant which is heating and cooling our building, making us nearly energy autonomous and saving the environment which was always important for us.

You are our co-designer developing customised solutions – select EVOLine products and modules from our catalogue to meet your bespoke requirements exactly. The new EVOLine Configurator supports you online and should you prefer, please contact us directly.

Our team is happy to advise and actively support you.

Sincerely



*Siegfried Schulte*

Siegfried Schulte

Founder / Owner



*Steffen Waldminghaus*

Steffen Waldminghaus

Managing Director



*Jan Schulte*

Jan Schulte

Managing Director

# Index

## Systems



5



9

Port



13

FrameDock



17

Dock



21

R-Dock



25

U-Dock



29

V-Dock

## Modules



33

Modules

## Add-On



43

Cable  
Management



47

Accessories

During 2015 – 2018 staggering 6 EVoline products were presented with the highest national and international Design Awards. One of these products received the outstanding German Design Award and another one the German Design Award Special Mention!

Three of the products received the world`s most prestigious USA design award ‘Good Design’.

EVoline®  
+ Function  
Design



[Relocatable Power Tap]  
E363662










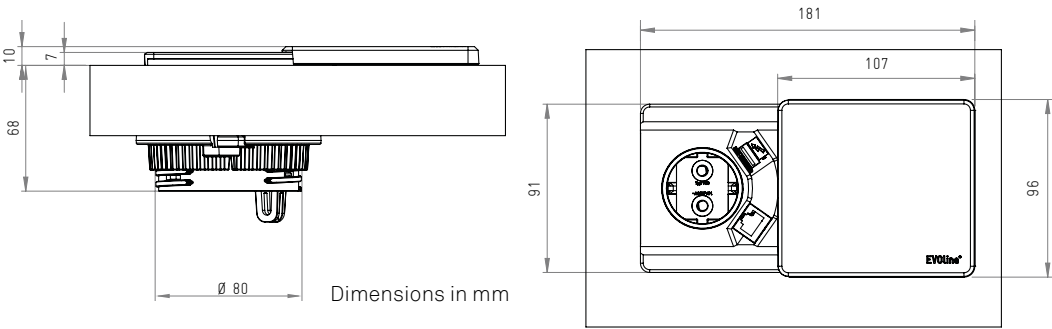

UL listed and tested to meet UL 1363.  
Electrical codes vary by location. Please check with your electrician to verify that this unit meets your local code before installing.

# EVoline® Square80

EVoline Square80 fits into standard openings that are pre-made with a diameter of 80 mm. It provides a power socket, a USB charger, and a data connection.

In its Qi version EVoline Square80 offers an additional wireless charging surface integrated into the cover, for charging of Qi capable mobile phones.



Description	Picture	Specifications	Order Number
<b>EVoline Square80</b>  For surface thickness up to 50 mm. Mounting hole ø 80 mm. Configuration: 1x NEMA 5 – 15R, 15 A Receptacle with tamper resistance 1x USB Charger Type A *, Output voltage: 5V <sub>DC</sub> Rated output current: 1A, Fixed supply cable 6 ft with angled plug.   [Relocatable Power Tap] E363662		Cover and housing black	
		CAT 6 Socket 9 ft Cable and plug	1592 7002 0100
		9 ft pull out CAT 6 patch cable	1592 7002 0200
		without data	1592 7002 0300
<b>EVoline Square80 with Wireless Charger</b>  For surface thickness up to 50 mm. Mounting hole ø 80 mm. Configuration: 1x NEMA 5 – 15R, 15 A Receptacle with tamper resistance 1x USB Charger Type A *, Output voltage: 5V <sub>DC</sub> Rated output current: 1A, Fixed supply cable 6 ft with angled plug.   [Relocatable Power Tap] E363662		Cover in simulated stainless steel housing in black	
		CAT 6 Socket 9 ft Cable and plug	1592 7002 0700
		9 ft pull out CAT 6 patch cable	1592 7002 0800
		without data	1592 7002 0900
<b>EVoline Square80 with Wireless Charger</b>  For surface thickness up to 50 mm. Mounting hole ø 80 mm. Configuration: 1x NEMA 5 – 15R, 15 A Receptacle with tamper resistance 1x USB Charger Type A *, Output voltage: 5V <sub>DC</sub> Rated output current: 1A, Fixed supply cable 6 ft with angled plug.   [Relocatable Power Tap] E363662		Cover and housing black	
		9 ft Cable and plug CAT 6 Socket	1592 7002 0400
		9 ft pull out CAT 6 patch cable	1592 7002 0500
		without data	1592 7002 0600
<b>EVoline Square80 with Wireless Charger</b>  For surface thickness up to 50 mm. Mounting hole ø 80 mm. Configuration: 1x NEMA 5 – 15R, 15 A Receptacle with tamper resistance 1x USB Charger Type A *, Output voltage: 5V <sub>DC</sub> Rated output current: 1A, Fixed supply cable 6 ft with angled plug.   [Relocatable Power Tap] E363662		Cover in simulated stainless steel housing in black	
		9 ft Cable and plug CAT 6 Socket	1592 7002 1000
		9 ft pull out CAT 6 patch cable	1592 7002 1100
		without data	1592 7000 1200


**Wireless charging**

- resonant wireless coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges any Qi compatible device
- transmitter coil is active only when a connection to the receiving device is made

Technical changes and printing errors reserved. | Pictures may show non-UL-variants.





 [Furniture Power Distribution Unit]  
E482662

UL listed and tested to meet UL 962A with 1 – 5 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.




red  
dot  
design award


# EVoline® Port



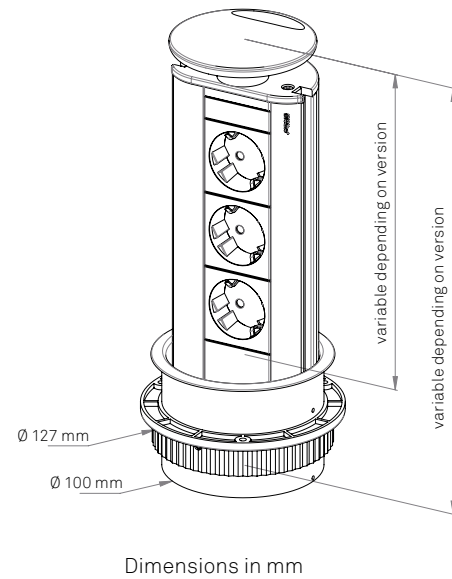

EVoline Port let sockets and cables simply disappear. Just the collar and cover of the Port are visible on the work surface.

The easy pull-up motion let the high-quality aluminium body appear and subsequently a push-down motion let it disappear below the surface even with attached plugs. The patented rocking cover creates enough space for a cable outlet.

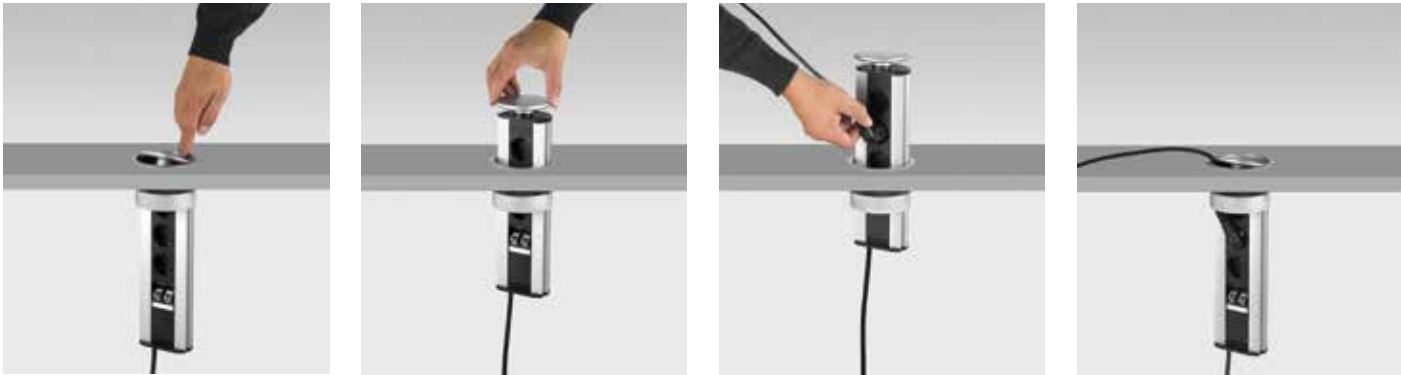

Description	Picture	Specifications	Order Number
<b>EVoline Port</b>  1x USB-Charger 2x UL socket, NEMA 5-15, with tamper resistance, with black flap with 6ft cable and UL plug  Installation gasket 112 x 100 x 1.0 mm grey 3 set screws, enclosed  Cable lengths described from module inside the profile to plug or socket on the end of the cable.		Aluminum profile silver anodized, Plastic Silver lid and collar	1593 1040 7401
		Aluminum profile silver anodized, Stainless Steel lid and grey plastic collar	1593 1040 7701
		Aluminum profile black anodized, black plastic lid and collar	1593 1040 7801
		Aluminum profile silver anodized, white plastic lid and collar	1593 1040 8001
<b>EVoline Port</b>  1x USB-Charger 3x UL socket, NEMA 5-15, with tamper resistance, with black flap with 6ft cable and UL plug  Installation gasket 112 x 100 x 1.0 mm grey 3 set screws, enclosed  Cable lengths described from module inside the profile to plug or socket on the end of the cable.		Aluminum profile silver anodized, Plastic Silver lid and collar	1593 1040 7501
		Aluminum profile silver anodized, Stainless Steel lid and grey plastic collar	1593 1040 7601
		Aluminum profile black anodized, black plastic lid and collar	1593 1040 7901
		Aluminum profile silver anodized, white plastic lid and collar	1593 1040 8101



Description	Picture	Specifications	Order Number
<b>Empty Housing EVOLine Port</b>  Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm.		Plastic Silver lid and collar  Stainless Steel lid and grey plastic collar	9330 1830 6600  9330 1360 6600
<b>Empty Housing EVOLine Port CLASSIC</b>  Aluminium housing, plated inn antique brass colour. For surface thickness up to 50 mm. Mounting hole ø 102 mm		Plastic antique brass lacquered lid and collar	9330 2710 6600
<b>Empty Housing EVOLine Port CHROME</b>  Chrome plated aluminium housing. For surface thickness up to 50 mm. Mounting hole ø 102 mm.		Chromed steel lid and black plastic collar	9330 2750 6600
<b>Empty Housing EVOLine Port BLACK</b>  Aluminium housing, black anodised. For surfaces thickness up to 50 mm. Mounting hole ø 102 mm.		Plastic black lid and collar	9330 5560 6600




UL listed and tested to meet UL 962A with 1 – 5 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.






# EVoline® FrameDock

EVoline FrameDock is a flush fitting system which can be installed horizontally or vertically - be it on a desk, a kitchen worktop, a wall, or a side of a piece of furniture. It can be mounted almost everywhere due to its low mounting depth of 51 mm and installation from the top:

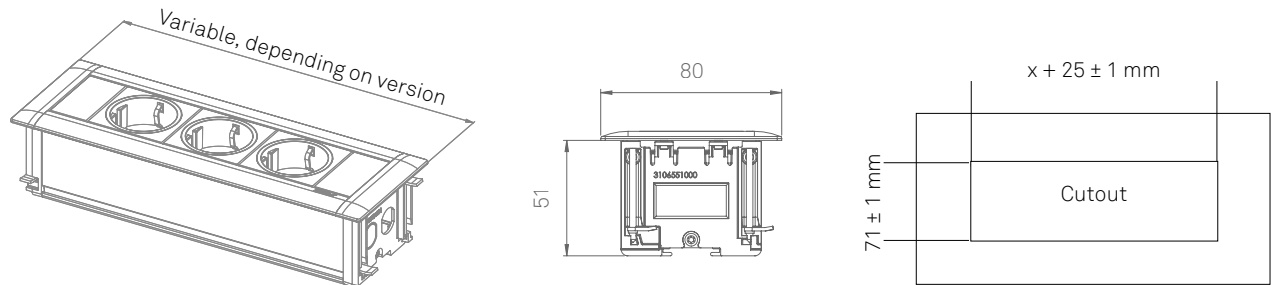High quality design, customisable components and yet discreet.




Dimensions in mm

Description	Picture	Specifications	Order Number
<b>EVoline FrameDock</b>  2x UL socket, NEMA 5-15, with tamper resistance, black 1x USB-Charger 6 ft connection cable with UL plug, cable inlet on the back of the profile.  Cable lengths described from module inside the profile to plug or socket on the end of the cable.   [Furniture Power Distribution Unit] E482662		Aluminum profile silver anodized, black endcaps	1596 1002 5000
<b>Empty Housing FrameDock</b>  For surface thickness up to 38 mm		Aluminum profile silver anodised Screw covers black plastic  Aluminum profile silver anodised; Screw covers silver lacquered plastic  Aluminum profile black anodised Screw covers black plastic	9331 2180 6600  9331 2550 6600  9331 5330 6600






 [Relocatable Power Tap]  
E363662


UL listed and tested to meet UL 1363 with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.

# EVOLine® Dock


EVOLine Dock sits above the desk allowing maximum workspace. Various fixing options are available like EVOLine Quicklock, clamps, pillars, etc.

The configurable charging and data station can be equipped with the complete EVOLine Modules range.

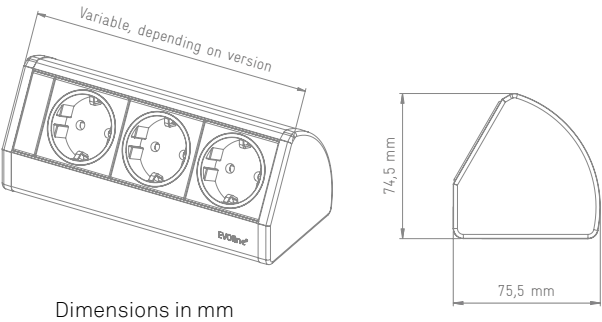

Description	Picture	Specifications	Order Number
<b>EVOLine Dock</b>  2x UL socket, NEMA 5-15, with tamper resistance, black, 1x USB-Charger 6 ft cord with UL plug. Cable lengths described from module inside the profile to plug or socket on the end of the cable.		Aluminum profile silver anodized, silver endcaps  Aluminum profile black anodized, black endcaps  Aluminum profile white powder coated, white endcaps	1593 0393 7300  1593 0393 7100  1593 0393 7700
 [Relocatable Power Tap] E363662			
<b>Empty Housing EVOLine Dock BLACK</b>  Aluminium housing		Aluminum profile black anodized, black endcaps	9330 1811 6600
<b>Empty Housing EVOLine Dock SILVER</b>  Aluminium housing		Aluminum profile silver anodized, black endcaps	9330 1810 6600
<b>Empty Housing EVOLine Dock STAINLESS</b>  Aluminium housing		Aluminum profile ALANOX anodized, black endcaps	9330 8450 6600
<b>Empty Housing EVOLine Dock WHITE</b>  Aluminium housing		Aluminum profile white powder coated, white endcaps	9331 3530 6600



 [Furniture Power Distribution Unit]  
E482662


UL listed and tested to meet UL 962A with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.



# EVoline® R-Dock

EVoline R-Dock can be installed into any right-angled corner.


With its flat back and angled front fascia, it is comfortable to use. Freely configurable.

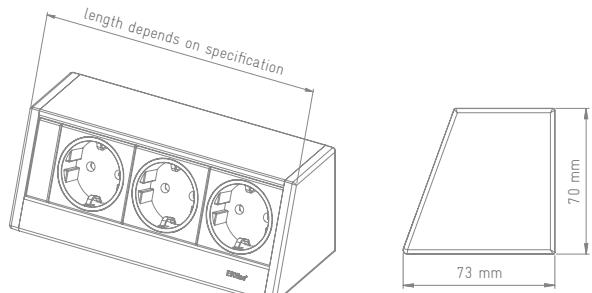

Dimensions in mm

Description	Picture	Specifications	Order Number
<b>EVoline R-Dock</b>  2x UL socket, NEMA 5-15, with tamper resistance, 1x USB-Charger 6 ft cord with UL plug. Cable lengths described from module inside the profile to plug or socket on the end of the cable.		Silver anodised	1598 0001 1900
<b>Empty Housing EVoline R-Dock*</b>  Aluminium housing.		Silver anodised	9331 0620 6600
<b>Empty Housing EVoline R-Dock*</b>  Aluminium housing.		White powder-coated	9331 4340 6600




 [Furniture Power Distribution Unit]  
E482662

UL listed and tested to meet UL 962A with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.




# EVoline® U-Dock

EVoline U-Dock can be mounted to any work surface in various ways.

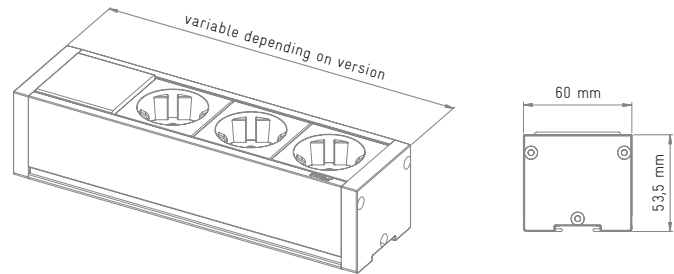As a robust base for a professional power and data supply, the freely configurable aluminium profile can be equipped with various power and data modules as well as safety devices for protection of personnel and machinery.



Dimensions in mm

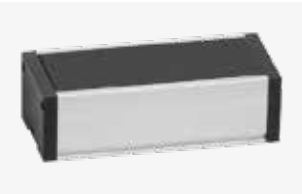Description	Picture	Specifications	Order Number
<p><b>EVoline U-Dock</b></p> <p>2x UL socket, NEMA 5-15, with tamper resistance 1x USB-Charger 6 ft cord with UL plug. Cable lengths described from module inside the profile to plug or socket on the end of the cable.</p> <p> (Furniture Power Distribution Unit) E482662</p>		<p>Silver anodised End caps optionally with mounting angles</p>	1596 0003 8200
<p><b>Empty Housing EVoline U-Dock</b></p> <p>Aluminium housing</p>		<p>Silver anodised End caps optionally with or without mounting angles</p>	9330 8510 6600






**UL** **US** [Furniture Power Distribution Unit]  
LISTED E482662

UL listed and tested to meet UL 962A with 1 – 8 socket outlets.  
Electrical codes vary by location. Please check with your electrician  
to verify that this unit meets your local code before installing.

# EVoline® V-Dock

The EVoline V-Dock gives dead corners a benefit. It can be installed horizontally or vertically and is variable in length. In addition, the supply cable is concealed using the space between the back of the profile and the wall corner.

Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.

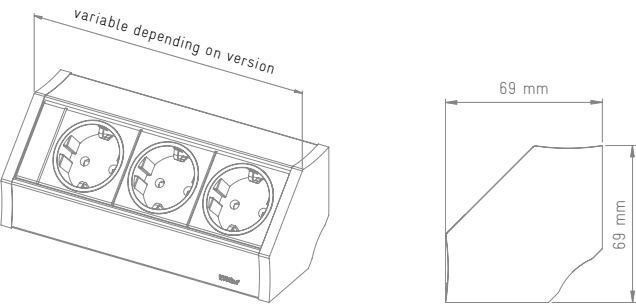

Dimensions in mm

Description	Picture	Specifications	Order Number
<b>EVoline V-Dock</b>  2x UL socket, NEMA 5-15, with tamper resistance, 1x USB-Charger 6 ft cord with UL plug. Cable lengths described from module inside the profile to plug or socket on the end of the cable.		Silver anodised	1593 6033 6300
<b>Empty housing EVoline V-Dock</b>  Aluminium housing From a length of 250 mm, 2 profile brackets of 100 mm are required for fixing.		Silver anodised	9330 5600 6600
<b>Empty housing EVoline V-Dock</b>  Aluminium housing From a length of 250 mm, 2 profile brackets of 100 mm are required for fixing.		Black anodised	9331 5850 6600

Technical changes and printing errors reserved. | Pictures may show non-UL-variants.





# EVoline® Modules

EVoline systems can be configured to individual needs with a wide range of modules available - there is no general solution for the supply of e-connectivity.

Often just power sockets are the sufficient configuration: in a different environment international sockets plus USB Chargers may be the right choice. With telephones, EDP and multimedia connectors options become even more diverse.

Whether a data or a HDMI connector, the individual application defines the requirements.






Realizable combinations of shown modules depend on the UL regulations. Please ask for more information.





The chart below gives an overview about country specific socket versions. Deviations may occur.

<b>Socket VDE (CEE 7/3)</b> 230 V, 16 A		Plug Type F, E+F, C	Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine
<b>Socket (CEE 7/5)</b> 230 V, 16 A		Plug Type E, E+F, C	France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia
<b>Socket (BS 962A)</b> 230 V, 3,15 A oder 5 A		Plug Type G	Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe
<b>Socket (SEV 1011)</b> 230 V, 10 A, T13		Plug Type J, C	Switzerland, Liechtenstein
<b>Socket (SEV 1011)</b> 230 V, 16 A, T23		Plug Type J, C	Switzerland, Liechtenstein
<b>Socket (DS 608842-D1)</b> 230 V, 13 A		Plug Type K, C	Denmark, Greenland
<b>Socket (DS 608842-D1)</b> 230 V, 13 A, EDV		Plug Type K EDV	Denmark, Greenland
<b>Socket (CEI 23-16-VII)</b> 230 V, 16 A oder 10 A		Plug Type L, C	Italy, Chile, Cuba
<b>Socket (AS 3112)</b> 230 V, 10 A		Plug Type I	Australia, New Zealand, Papua New Guinea, several Pacific Islands
<b>Socket (NEMA 5-15)</b> 120 V, 15 A		Plug Type B	USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Carribian Islands




\* Power modules are only available completely assembled in EVoline products.




Description	Picture	Order Nr. & Specifications	<div>/ Dock /</div>	<div>/ FrameDock /</div>	<div>/ Port /</div>	<div>/ R-Dock /</div>	<div>/ V-Dock /</div>	<div>/ U-Dock /</div>
<b>Socket 0°, 15 A</b>  USA, Canada, * for plug type: B (NEMA, 5-15) black  Installation dimensions: 50 x 50 mm		9330 5360 6600 without tamper resistance  9332 3640 6600 with tamper resistance	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>
<b>Socket 60°, 15 A</b>  USA, Canada, * for plug type: B (NEMA, 5-15)  Installation dimensions: 50 x 50 mm		9330 5370 6600 without tamper resistance  9332 3650 6600 with tamper resistance	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>
<b>Socket 0°, 15 A Angled Outlet</b>  USA, Canada, * for plug type: B (NEMA, 5-15) Not suitable for angled plugs.  Installation dimensions: 75 x 50 mm		9330 4030 6600 without tamper resistance and flap		<div>•</div>				
<b>Socket 0°, 15 A Angled Outlet</b>  USA, Canada, * for plug type: B (NEMA, 5-15) Not suitable for angled plugs.  Installation dimensions: 75 x 50 mm		9332 3630 6600 with tamper resistance and flap		<div>•</div>				
<b>USB Charger*</b>  USB Type A Charger, charging function only. Rated supply voltage: 100-240 VAC +/-10%. No-load power consumption at 230 VAC <= 0,1 Watt. Output voltage: 5VDC +/-5%. Rated output current: 1 A  Installation dimensions: 25 x 50 mm		9331 5580 6600 black	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>

Technical changes and printing errors reserved. | Pictures may show non-UL-variants.





Description	Picture	Order Nr. & Specifications	<div>/ Dock /</div>	<div>/ FrameDock /</div>	<div>/ Port /</div>	<div>/ R-Dock /</div>	<div>/ V-Dock /</div>	<div>/ U-Dock /</div>
<b>Power Supply Module with cable and Plug</b>  Type B 115 V. 15 A, AWG 14 i.e. USA, Canada (UL/CSA)		9330 9160 6600 Cable length 3 m, black  Differrent lengths on request	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>
<b>Overload Circuit Breaker*</b>  Switch-on overload switch Installation dimensions: 25 x 50 mm		9332 0380 6600 U.S.A. Fuse: 15 A , 125 V~	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>

Technical changes and printing errors reserved. | Pictures may show non-UL-variants.



Description	Picture	Order Nr. & Specifications	<div>/ Dock /</div>	<div>FrameDock Port /</div>	<div>R-Dock / V-Dock / U-Dock /</div>
<b>Data Plate with Data Socket</b> <b>Reichle &amp; De-Massari</b>		9330 8270 6600 RJ45 CAT6 unshielded 9 ft Cable, Plug	•	•	• •
with Cable and Plug / Socket Instal- lation Dimensions: 25 x 50 mm		9330 7860 6600 RJ45 CAT6 shielded 9 ft Cable, Plug	•	•	• •
		9331 0020 6600 RJ45 CAT6A shielded 9 ft Cable, Plug	•	•	• •
<b>Data Plate Data Socket</b> <b>Reichle &amp; De-Massari</b>		9331 0010 6600 RJ45 CAT6 unshielded 9 ft Cable, Plug		•	• •
Angled Outlet with labeling field with Cable and Plug		9330 6140 6600 RJ45 CAT6 shielded 9 ft Cable Plug		•	• •
Installation Dimensions: 50 x 50 mm		9331 0030 6600 RJ45 CAT6A shielded 9 ft Cable Plug		•	• •
<b>Data Plate with 2x Data Sockets</b> <b>Reichle &amp; De-Massari</b>		9330 4340 6600 RJ45 CAT6 unshielded 9 ft Cable, Plug		•	• •
Angled Outlet with labeling field, with Cable and Plug / Socket		9330 1230 6600 RJ45 CAT6 shielded 9 ft Cable, Plug		•	• •
Installation Dimensions: 50 x 50 mm		9331 0040 6600 RJ45 CAT6A shielded 9 ft Cable, Plug		•	• •

Description	Picture	Order Nr. & Specifications	<div>/ Dock /</div>	<div>FrameDock Port /</div>	<div>R-Dock / V-Dock / U-Dock /</div>
<b>Data Plate with Data Socket</b> <b>ELBRO</b>		9330 6550 6600 RJ45 CAT6 unshielded	•	•	• •
Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Installation Dimensions: 25 x 50 mm		9330 8410 6600 (RJ45) CAT6 shielded	•	•	• •
		9331 4080 6600 (RJ45) CAT6A shielded	•	•	• •
<b>Data Plate with Data Socket</b> <b>ELBRO</b>		9330 6560 6600 (RJ45) CAT6 unshielded		•	• •
Angled Outlet with labeling field. Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Installation Dimensions: 50 x 50 mm		9330 5880 6600 (RJ45) CAT6 shielded		•	• •
		9331 4090 6600 (RJ45) CAT6A shielded		•	• •
<b>Data Plate with 2x Data Sockets</b> <b>ELBRO</b>		9330 6570 6600 (RJ45) CAT6 unshielded		•	• •
Angled Outlet with Labeling Field Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Installation Dimensions: 50 x 50 mm		9330 3920 6600 (RJ45) CAT6 shielded		•	• •
		9331 4100 6600 (RJ45) CAT6A shielded		•	• •














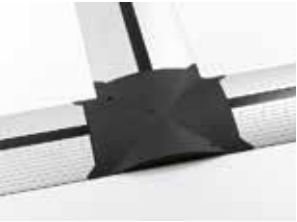



Description	Picture	Order Nr. & Specifications	<div>/ Dock /</div>	<div>/ FrameDock Port /</div>	<div>/ R-Dock / V-Dock / U-Dock /</div>
<b>Audio Port 3.5mm</b>  1 x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm		9330 0910 6600 9 ft cable and plug	•	•	• • •
<b>Audio Port 3.5mm</b>  Angled outlet with labeling field. 1 x Stereo Jack socket 3.5 mm Installation dimensions: 50 x 50 mm		9330 2460 6600 9 ft cable and plug	•	•	• • • •
<b>HDMI-Socket</b>  HDMI 1.4 connector with gilded contacts. Installation dimensions: 25 x 50 mm.		9330 6060 6600 1 ft Cable and Socket  9330 6070 6600 9 ft Cable and Plug  16 ft Cable and Plug	• •	•	• • • • •
<b>HDMI-Socket</b>  Angled outlet with labeling field HDMI 1.4 connector with gilded contacts. Installation dimensions: 50 x 50 mm		9330 6080 6600 1 ft Cable and Socket  9330 6090 6600 9 ft Cable and Plug 16 ft Cable and Plug	•	•	• • • •




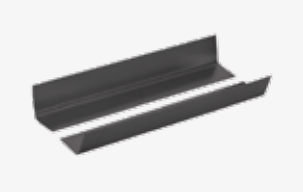
Description	Picture	Order Nr. & Specifications	<div>/ Dock /</div>	<div>/ FrameDock Port /</div>	<div>/ R-Dock / V-Dock / U-Dock /</div>
<b>DisplayPort-Socket</b>  for digital signals DP 1.2 compliant. Installation dimensions: 25 x 50 mm		9331 7510 6600 1.3 ft Cable and Socket	•	•	• • •
<b>DisplayPort-Socket</b>  Angled outlet with labeling field for digital signals DP 1.2 compliant. Installation dimensions: 50 x 50 mm		9331 7520 6600 1.3 ft Cable and Socket		•	• •
USB 3.0 Connector  USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Installation dimensions: 25 x 50 mm.		9331 8620 6600 1 ft Cable and Socket  9331 1450 6600  3 ft USB Cable Plug USB 3 Type A  9 ft USB Cable Plug USB 3 Type A	• •	•	• •
USB 3.0 Connector  USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 8630 6600 1 ft Cable and Socket  9331 1460 6600 3 ft USB Cable, Plug USB 3 Type A  9 ft USB Cable Plug USB 3 Type A		•	• • • •

Description	Picture	Order Nr. & Specifications	<div>/ Dock /</div>	<div>FrameDock /</div>	<div>Port /</div>	<div>R-Dock /</div>	<div>V-Dock /</div>	<div>U-Dock /</div>
<b>Cable Outlet Module</b> <b>1 cable passage</b>		9331 3790 6600 Ø 0.3 in	•	•	•	•	•	•
Cable can be pulled through		9331 0560 6600 Ø 0.4 in	•	•	•	•	•	•
Colour: black		9331 1670 6600 Ø 0.66 in	•	•	•	•	•	•
Installation dimensions: 50 x 50 mm		Additional diameters on demand						
<b>Cable Outlet Module</b> <b>2 cable passages</b>		9331 3800 6600 Ø 0.3 in	•	•	•	•	•	•
Cable can be pulled through		9331 1930 6600 Ø 0.4 in	•	•	•	•	•	•
Colour: black		Additional diameters on demand						
Installation dimensions: 50 x 50 mm								








Description	Picture	Specifications	Order Number
<b>Bridge Module Arc 90°</b>  includes 4 Fixing bolts	 		1593 5090 0600
<b>Bridge Module T</b>  includes 6 Fixing bolts	 		1593 5090 0500
<b>Bridge Module Cross</b>  includes 8 Fixing bolts	 		1593 5090 0200
<b>Bridge Module Adapter WireLane</b>  can also be used as end piece.	 		1593 5090 0100
<b>Bridge Module Vertical</b>	 		1593 5090 0400
<b>Bridge Connector</b>  2 Pieces	 		1593 5090 0300





Description	Picture	Specifications	Order Number
<b>EVoline Bridge</b>  cable cover made of aluminium for screw fixing, with black trim, without screws		<b>4 CableClips</b>  Length:1.6 ft Length: 2.6 ft Length: 3.9 ft	  1593 5010 5000 1593 5010 8000 1593 5011 2000
<b>EVoline WireLane</b>  under desk cable channel made of plastic. One package consists of 3 pieces, 250-330 mm each. The elements can be linked and separated.		<b>8 CableClips</b>  Length: 5.2 ft Length: 6 ft  Length: 9.8– 13 in  Colour: black Colour: lightgrey	     6593 5201 0000 6593 5211 0000
<b>EVoline WireLane Strain Relief</b>  in black plastic, with two clamps for cable			6593 5290 0100

Description	Picture	Specifications	Order Number
<b>EVoline Rail</b>  For under desk installation, the EVoline Rail is available for the EVOline U-Dock and EVoline Express range. Bespoke profile lengths available upon request.		<b>for EVoline U-Dock</b>  <b>2 black plastic brackets with 2 aluminium profiles</b>  Profile length 5.9 in Profile length 11.8 in Profile length 19.6 in	   1593 5400 0700 1593 5400 0100 1593 5400 0200
		<b>3 black plastic brackets with 4 aluminium profiles</b>  Profile length 2 x 11.8 in Profile length 2 x 15.7 in	  1593 5400 0500 1593 5400 0600
		<b>Individual</b>  1 black plastic brackets for EVoline U-Dock	  9331 6220 0000
		1 Pair Aluminium profiles per 3.9 in	9331 6210 0000



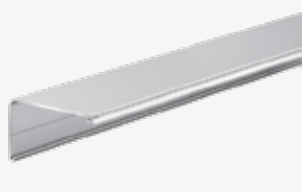

Description	Picture	Specifications	Order Number
<b>Mounting Clamp</b>  twist-proof including non-slip covering Colour: black for profiles: Dock, U-Dock, R-Dock		Span width 8 40 mm Span width 8 40 mm, 2 × Span width 40 75 mm Span width 40 75 mm, 2 ×	1599 0902 1200 1599 0902 0500 1599 0902 1300 1599 0902 1000
<b>Mounting Clamp</b>  twist-proof including non-slip covering Colour: white for profiles: Dock, U-Dock, R-Dock		Span width 8 – 40 mm Span width 8 – 40 mm, 2 × Span width 40 – 75 mm Span width 40 75 mm, 2 ×	1599 0909 3300 1599 0909 5600 1599 0909 3900 1599 0909 5700
<b>Stainless Steel Mounting Clamp</b>  twist-proof desk clamp for EVOLine profiles, installed and secured with allen screws For profiles: Dock, U-Dock, R-Dock		For Tabletops thickness 18 – 25 mm	1599 0909 1500
<b>Mounting set</b> for under cabinet installation  consists of two EVOLine Dock brackets with wood screws screw: 3.5 x 15 mm			1599 0903 8300
<b>Mounting set</b> for desk installation  consists of two EVOLine Dock brackets with wing nut screws screw: M4 x 40 mm			1599 0903 8200

Description	Picture	Specifications	Order Number
<b>Angle Profile</b>  for fixing of EVOLine V-Dock		Length: 100 mm Length: 60 mm	1599 0908 4400 1599 0909 6400
<b>EVOLine Quicklock Pro</b>  fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles: EVOLine Dock, EVOLine R-Dock		Length: 100 mm without bracket  length: 150 mm includes bracket for EVOLine Wire-Lane connection  length: 200 mm includes bracket for EVOLine WireLane connection	1599 0910 8500  1599 0910 8300  1599 0910 8400
<b>EVOLine Rubber gasket</b>  fits under the collar of the EVOLine Port.			1599 0903 9100
<b>EVOLine Laptop Secure</b>  Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.		Die-cast, silver-colored Length: 41 mm Breite: 9 mm Höhe: 22 mm	9331 3140 0000



# EV0line® Made in Germany

Our team of excellent engineers and developers create our entire product range with special emphasis on maximum installation efficiency and detail. One example is our fully automated special machine for patented switches.

Standard products in thousands, customised single-unit products and millions of special switches per year. Every single item is recorded and tested for function and safety before dispatch.

Whether plastic parts or metal parts with silver contacts: All parts are produced in our own plant and tested throughout the production process. This pattern continues in our assembly lines. We are reaching zero-defect quality.

It goes without saying that we do not make use of temporary workers or piecework to manufacture our Hightech Products.


Our employees work self-responsibly.

We are building tools - in a modular way - mainly in our own tool making department. Outsourcing remains a foreign word for us.

Therefore we updated our company's logo:



invented and made by  
Schulte Elektrotechnik,  
Lüdenscheid, Germany

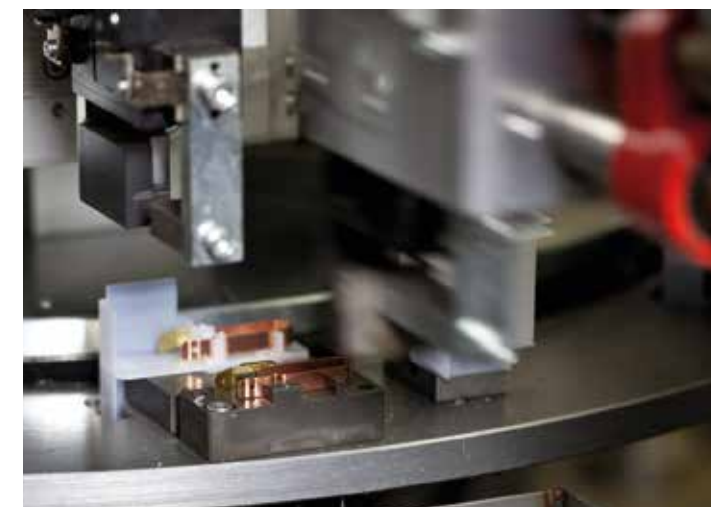



## Schulte Elektrotechnik GmbH & Co. KG

Jüngerstraße 21  
D - 58515 Lüdenscheid  
Germany

Telefon +49 23 51 / 94 81 - 0  
Fax +49 23 51 / 4 26 58  
e-mail [info@schulte.com](mailto:info@schulte.com)  
Internet [www.evoline.com](http://www.evoline.com)

## Schulte Electro Systems Corporation

41W020 Seavey Road  
Sugar Grove, IL 60554-9573  
USA

Telefon +1 630-409-9445  
e-mail [sales@evoline-usa.com](mailto:sales@evoline-usa.com)  
Internet [www.evoline-usa.com](http://www.evoline-usa.com)

