



EVoline® V-Dock



UL listed and tested to meet UL 962A with 1 – 8 socket outlets.
Electrical codes vary by location. Please check with your electrician
to verify that this unit meets your local code before installing.



EVoline® V-Dock





The EVoline V-Dock gives dead corners a benefit.



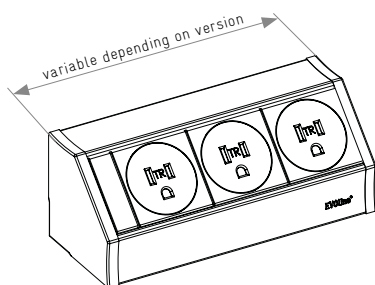


It can be installed horizontally or vertically and is variable in length. In addition, the supply cable is concealed using the space between the back of the profile and the wall corner.

Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.

Interchangeable modules for data and multimedia ensure unlimited flexibility for future requirements at the workspace.



Description	Picture	Specifications	Order Number
<p>EVOLine V-Dock</p> <p>2x UL socket, NEMA 5-15, with tamper resistance, 1x USB-Charger 6 ft cord with UL plug. Cable lengths described from module inside the profile to plug or socket on the end of the cable.</p> 		Silver anodised	1593 6033 6300
<p>Empty housing EVOLine V-Dock</p> <p>Aluminium housing From a length of 250 mm (1 31/32"), 2 profile brackets of 100 mm (3 15/16") are required for fixing.</p>		Silver anodised	9330 5600 6600
<p>Empty housing EVOLine V-Dock</p> <p>Aluminium housing From a length of 250 mm (1 31/32"), 2 profile brackets of 100 mm (3 15/16") are required for fixing.</p>		Black anodised	9331 5850 6600

Description	Picture	Specifications	Order Number
Angle Profile for fixing of EVoline V-Dock		Length: 100 mm (3 15/16") Length: 60 mm (2 23/64")	1599 0908 4400 1599 0909 6400
EVoline Quicklock Pro fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles: EVoline Dock, EVoline R-Dock	 	Length: 100 mm (3 15/16") without bracket length: 150 mm (5 29/32") includes bracket for EVO-line WireLane connection length: 200 mm (7 7/8") includes bracket for EVoline WireLane connection	1599 0910 8500 1599 0910 8300 1599 0910 8400
EVoline Rubber gasket fits under the collar of the EVoline Port.			1599 0903 9100
EVoline Laptop Secure Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.		Die-cast, silver-colored Length: 41 mm (1 39/64") Breite: 9 mm (23/64") Höhe: 22 mm (55/64")	9331 3140 0000

EVoline® Made in Germany



Schulte Elektrotechnik GmbH & Co. KG

Jüngerstraße 21
D - 58515 Lüdenscheid
Germany

Telefon +49 23 51 / 94 81 - 0
Fax +49 23 51 / 4 26 58
e-mail info@schulte.com
Internet www.evoline.com

Schulte Electro Systems Corporation

41W020 Seavey Road
Sugar Grove, IL 60554-9573
USA

phone +1 630-409-9445
e-mail sales@evoline-usa.com
Internet www.evoline-usa.com



invented and made by
Schulte Elektrotechnik,
Lüdenscheid, Germany

